


# ≡ BFS-GUARD-RAIL-CLAMP

suitable for use on parapets, precast concrete walls, or sheet pile walls

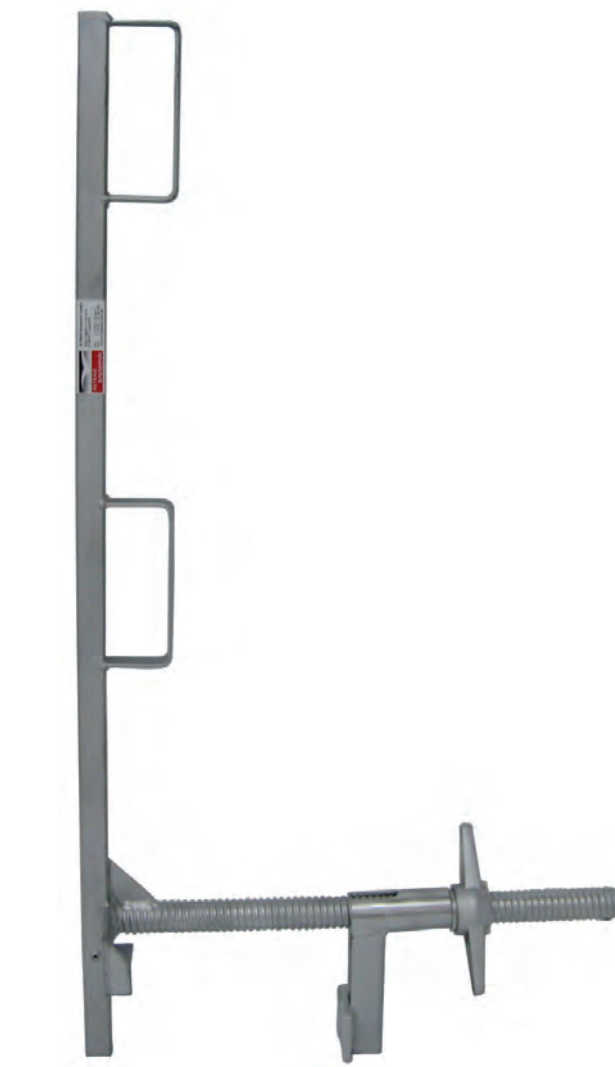

# BFS-GUARD-RAIL-CLAMP

Tested through in-house load tests according to DIN 13374 Class A

The **BFS-Guard-Rail-Clamp** is used for fall protection on concrete parapets, prefabricated elements, and sheet pile walls.

- max. distance of 2.0 m when using boards measuring 3 x 15 cm
- max. distance of 3.0 m when using scaffold tubes

- max. distance of 4.7 m when using aluminum scaffold ladders  
The BFS-Guard-Rail-Clamp is easily placed and secured with the wing nut.


- With plastic sleeve on precast concrete walls filled with cast-in-place concrete
- In civil engineering works on sheet pile walls, Berlin sheeting, or finished shoring units

## Applications:

- On parapets or an attic with a minimum depth of 13 cm

## Technical documentation:

Assembly and usage instructions

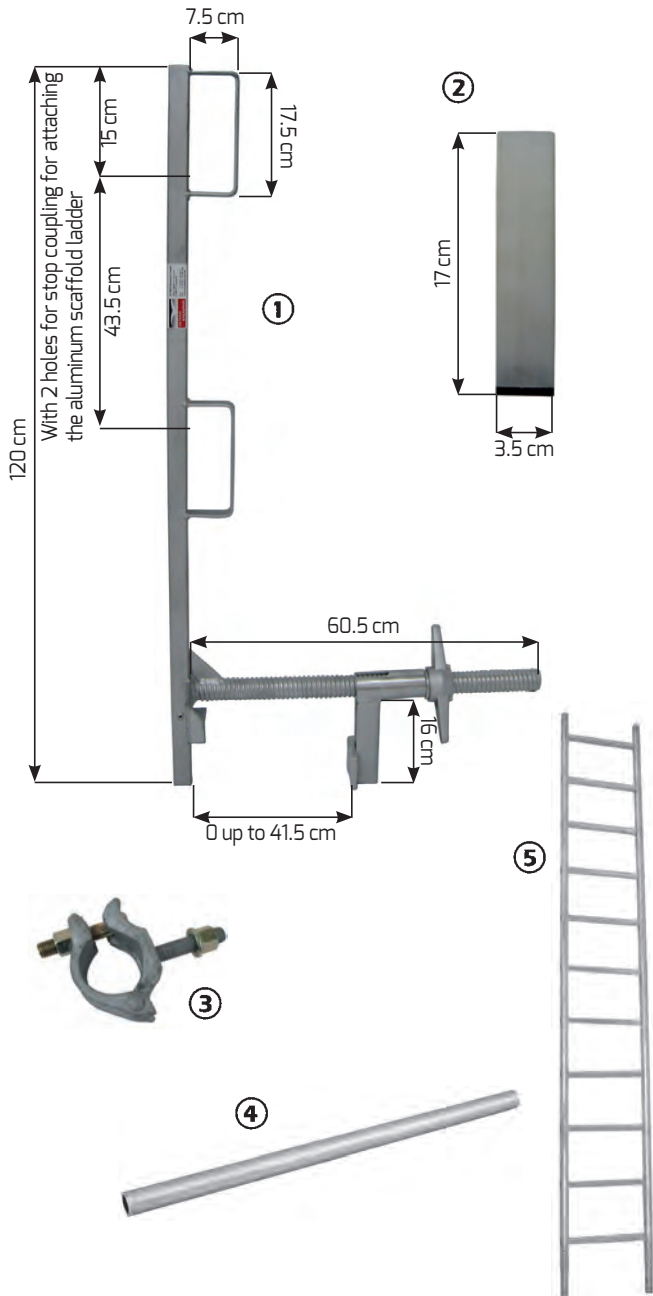

- |  |  |
|--|--|
| ① <b>BFS-Guard-Rail-Clamp</b><br>galvanized,<br>Weight 7.65 kg<br>Opening width 0 to 41.5 cm   | Item No. 71 10 00  |
| ② <b>Plastic sleeve with plug</b><br>Square tube 3.5 x 3.5 cm<br>L = 17 cm, Weight 2.4 kg,<br>(Packaging unit 50 pieces)   | Item No. 27 90 36  |
| <b>Accessories (Scaffolding Technology)</b>  |  |
| ③ <b>Screw coupling</b><br>19 A/F, with bolt M14x60  | Item No. ABKUP 6 00 05   |
| ④ <b>Aluminum scaffold tubes</b><br>3 m long, 4.50 kg<br>4 m long, 6.00 kg<br>5 m long, 7.50 kg<br>6 m long, 9.00 kg   | Item No. ABRDR 0 00 32<br>Item No. ABRDR 0 00 34<br>Item No. ABRDR 0 00 36<br>Item No. ABRDR 0 00 27 |
| ⑤ <b>Aluminum scaffold ladders</b><br>3 m long, 8.00 kg<br>4 m long, 10.00 kg<br>5 m long, 12.60 kg<br>6 m long, 14.50 kg  | Item No. ABSOG 8 00 04<br>Item No. ABSOG 8 00 01<br>Item No. ABSOG 8 00 02<br>Item No. ABSOG 8 00 03 |
| <b>Modular pallet Vario 830</b><br>(not illustrated) galvanized, Weight 91.00 kg<br>for storage of:<br>- 22 pieces of BFS Rail Clamp<br>- + scaffold tubes<br>- + boards | Item No. 82 28 88  |

## Your Benefits

- Quick assembly thanks to wing nut and pipe thread
- Closed board support brackets, providing added safety
- Adjustable range from 0 to 41.5 cm



The construction site images do not necessarily depict the entire construction site or safety situation. From a safety perspective, these representations are not intended as examples. Changes in technology, equipment, and pricing are reserved. Reproduction or photocopying, even in part, is prohibited.  
© ALTRAD Baumann